

All Enertech indoor and outdoor split system models have AHRI (Air-conditioning, Heating, and Refrigeration Institute) certified air handler and "A" coil (cased and uncased) matches for every model. That means better performance and guarantees the operating efficiency of the system, which is a requirement for many rebate and incentive programs.

## MP Series Multi-Position DX Air Handlers

- 2, 3, 4, 5, and 6 ton models
- AHRI match for Enertech manufactured split systems
- Multi-position air pattern
  - Ships in upflow configuration
  - Field convertible to downflow and horizontal configuration (downflow kit required for downflow operation)
- Variable speed ECM fan motor
- Factory-installed R-410A TXV
- Corrosion-proof plastic drain pan with primary and secondary drain connections
- Oversized copper tube/aluminum fin "A" coil for maximum efficiency
- Sweat refrigerant line set connections
- Narrow width (25" maximum) for small closet installations
- Slide-out blower assembly
- Optional downflow kit
- Optional field-installed internal electric heat with circuit breakers
- Optional filter rack with standard size 1" filters
- Consult price book for warranty coverage details



## AC Series DX "A" Coils

- 2, 3, 4, and 5 ton models
- AHRI match for Enertech geothermal brand split systems
- Uncased design for maximum flexibility, especially on retrofit applications
- Factory-installed R-410A TXV
- Corrosion-proof plastic drain pan with primary and secondary drain connections
- Oversized copper tube/aluminum fin "A" coil for maximum efficiency
- Sweat refrigerant line set connections
- Consult price book for warranty coverage details



## MC Series DX Cased Coils

- 2, 3, 4, and 5 ton models
- AHRI match for Enertech manufactured split systems
- Cased design for ease of installation, especially on retrofit applications
- Factory-installed R-410A TXV
- Drain pan with primary and secondary drain connections
- Oversized copper tube/aluminum fin "A" coil for maximum efficiency
- Sweat refrigerant line set connections
- Consult price book for warranty coverage details



## MP Series Multi-Position Hydronic Air Handlers

- 2, 3, 4, and 5 ton models
- Multi-position air pattern
  - Ships in upflow configuration
  - Field convertible to downflow and horizontal configuration
- Variable speed ECM fan motor
- Single coil for both chilled water and hot water
- Designed for 100°F to 120°F water in heating operation
- Optimized for use with EnerTech geothermal branded water-to-water heat pumps
- Corrosion-proof plastic drain pan with primary and secondary drain connections
- Oversized copper tube/aluminum fin "A" coil for maximum efficiency
- Copper sweat water connections
- Narrow width (25" maximum) for small closet installations
- Slide-out blower assembly
- Optional filter rack with standard size 1" filters
- Consult price book for warranty coverage details

## AC Series Hydronic "A" Coils

- 2, 3, 4, and 5 ton models
- Single coil for both chilled water and hot water
- Designed for 100°F to 120°F water in heating operation
- Optimized for use with EnerTech geothermal brand water-to-water heat pumps
- Corrosion-proof plastic drain pan with primary and secondary drain connections
- Copper sweat water connections
- Consult price book for warranty coverage details



## MC Series Hydronic Cased Coils


- 2, 3, 4, and 5 ton models
- Cased design for ease of installation, especially on retrofit applications
- Single coil for both chilled water and hot water
- Designed for 100°F to 120°F water in heating operation
- Optimized for use with EnerTech geothermal brand water-to-water heat pumps
- Corrosion-proof plastic drain pan with primary and secondary drain connections
- Copper sweat water connections
- Consult price book for warranty coverage details




Enertech air handler and "A" coil models are available for GeoComfort, Hydron Module and TETCO brand geothermal systems. Consult the appropriate price book for specific model numbers, cross-matching and additional product information. To place an order, contact your distributor or Enertech customer service.

## Cased "A" Coils

Series	Model	Size (Tons)	All Dimensions in Inches		
			A	B	C
DX	MCD024	2	17.5	21	20
	MCD036	3	21	21	24
	MCD060	4 - 5	24.5	21.5	34
Hydronic	MCH024	2	17.5	21	20
	MCH036	3	21	21	24
	MCH060	4 - 5	24.5	21.5	34

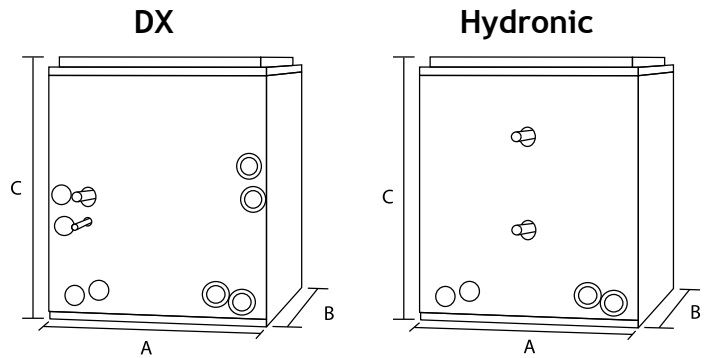


## DX "A" Coils

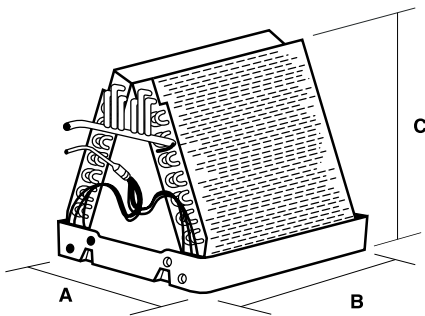


Model	Size (Tons)	All Dimensions in Inches				
		A	B	C	Liquid	Suction
ACD024	2	16.625	19	14.5	.375	.75
ACD036	3	19.625	19	18.5	.375	.75
ACD060	4 - 6	23.75	20.5	27.875	.375	.875

## Hydronic "A" Coils

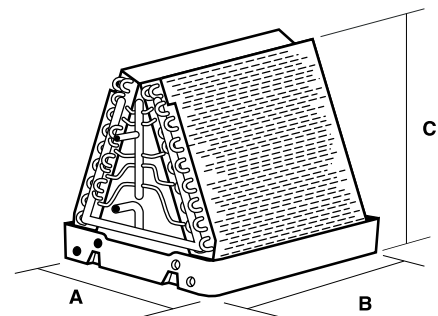

Model	Size (Tons)	All Dimensions In Inches		
		A	B	C
ACH024	2	16.63	19.00	18.5
ACH036	3	19.63	19.00	21.0
ACH048	4	23.92	20.50	28.0
ACH060	5	23.92	20.50	28.0

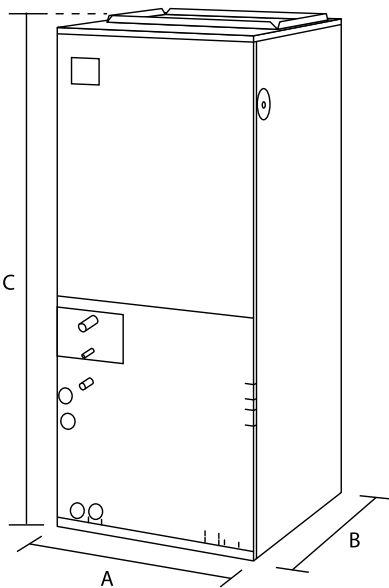

## DX & Hydronic Air Handlers

Series	Model	Size (tons)	All Dimensions in Inches			Return Air Opening	
			A	B	C	Width	Depth
DX	MPD024	2	17.625	21	43	15.5	19.75
	MPD036	3	21.125	21	43	19.75	19.75
	MPD060	4 - 5	24.625	21.75	58.875	23.5	20.75
	MPD072	6	24.625	21.75	58.875	23.5	20.75

Series	Model	Size (Tons)	All Dimensions in Inches			Return Air Opening	
			A	B	C	Width	Depth
Hydronic	MPH024	2	17.63	21	43	20.25	15.5
	MPH036	3	21.125	21	48.25	2.25	19
	MPH048	4	25	22	58.75	2.5	22.25
	MPH060	5	25	22	58.75	2.5	22.25

